


Standard Radius SCH 40 & 80 Conduit Sweeps

National Pipe & Plastics Schedule 40 & 80 Standard Radius Conduit Sweeps are manufactured in accordance with UL 651 and NEMA TC2, TC3 Standards. These sweeps are subject to in-process monitoring and quality control inspection to assure conformance with design specifications. Belled-End sweeps and optional bend radius' are available upon request.



UL651

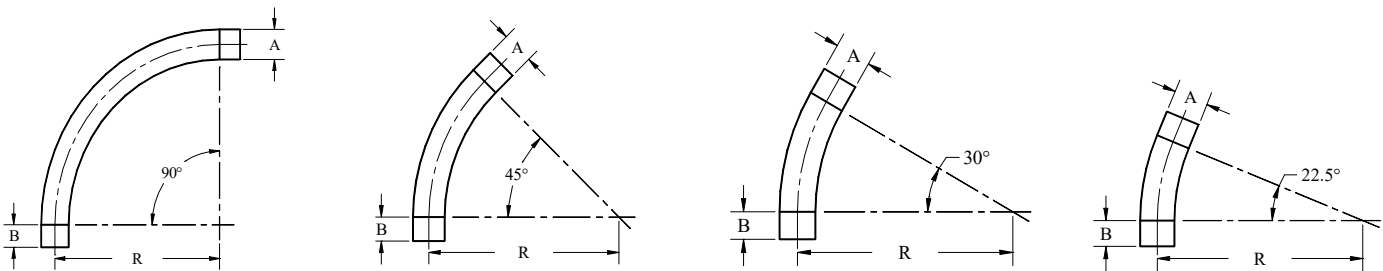

NOM. SIZE	A O. D. AVG.	MIN. WALL		B AVG.	R STD. RADIUS	PACKAGE QTY.			
		SCH 40	SCH 80			90°	45°	30°	22.5°
1/2"	0.840	0.109	0.147	1.500	4.000	50	50	50	50
3/4"	1.050	0.113	0.154	1.500	4.500	25	25	25	25
1"	1.315	0.133	0.179	1.875	5.750	25	25	25	50
1 1/4"	1.660	0.140	0.191	2.000	7.250	20	20	20	75
1 1/2"	1.900	0.145	0.200	2.000	8.250	25	20	20	20
2"	2.375	0.154	0.218	2.000	9.500	20	20	20	20
2 1/2"	2.875	0.203	0.276	3.000	10.500	10	25	25	40
3"	3.500	0.216	0.300	3.125	13.000	75	75	75	75
3 1/2"	4.000	0.226	N/A	3.250	15.000	75	75	75	50
4"	4.500	0.237	0.337	3.375	16.000	60	75	75	40
5"	5.563	0.258	0.375	3.625	24.000	42	42	42	20
6"	6.625	0.280	0.432	3.750	30.000	25	25	25	25